



# ONTAP v9

## Export Policies

Las políticas de acceso se definen a nivel de SVM (Storage Virtual Machines), también conocidas como Vservers. Para definir una política de acceso vamos al OnCommand System Manager → Storage SVMs → Seleccionamos la SVM sobre la que vamos a hacer los cambios y pinchamos en el icono **SVM Settings**

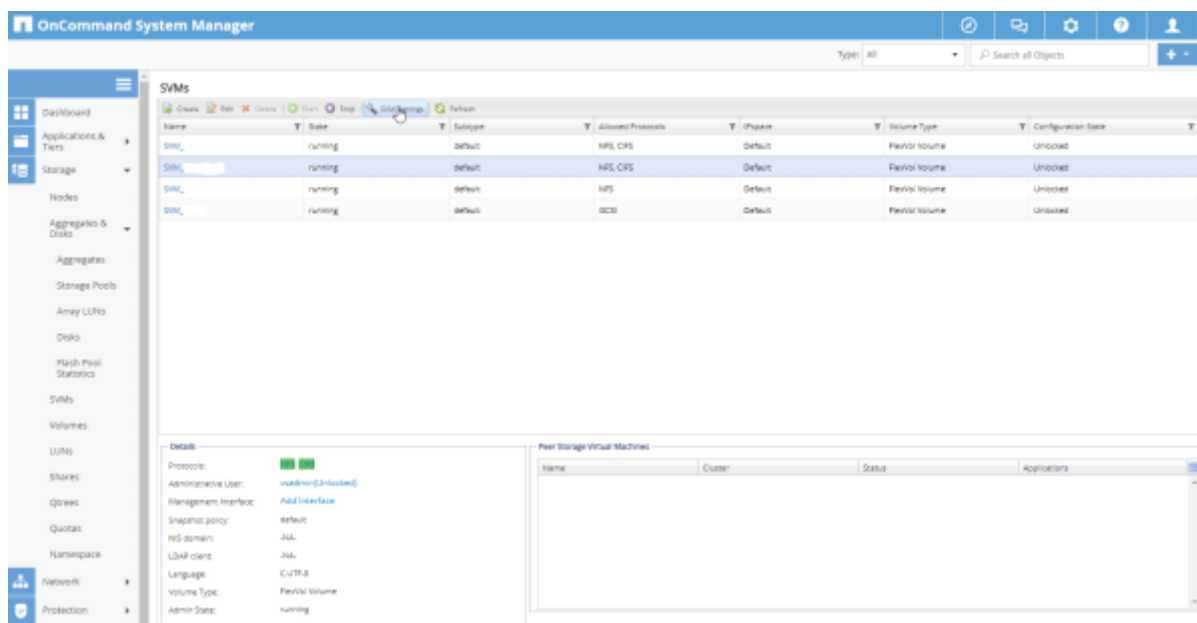

Una vez dentro de las opciones de la SVM vamos a Políticas → Export Policies y pinchamos sobre el icono create para crear una nueva política

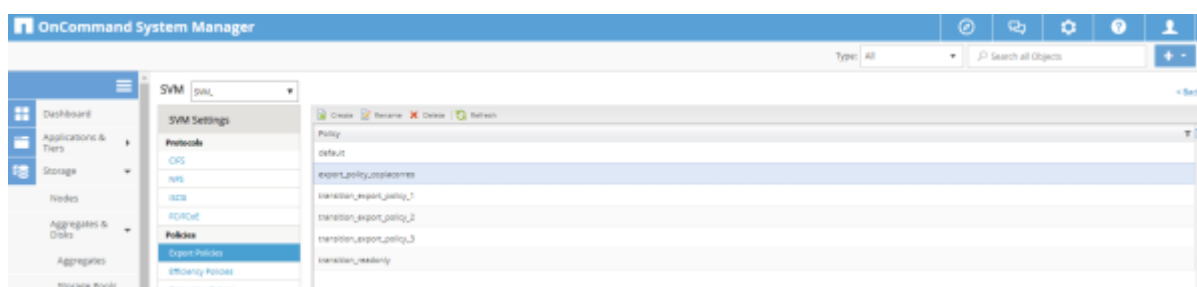

y en export rules añadimos las opciones por las que se va a conectar el cliente

### Create Export Policy

Policy Name:

☐ Copy Rules from

Storage Virtual Machine:

Export Policy:

Export Rules:

Add Edit Delete

Rule Index	Client
------------	--------

Client Specification:

Enter comma-separated values for multiple client specifications

Access Protocols:

☐ CIFS

☐ NFS ☐ NFSv3 ☐ NFSv4

☐ Flexcache

If you do not select any protocol, access is provided through any of the above protocols (CIFS, NFS, or FlexCache) configured on the Storage Virtual Machine (SVM).

Access Details:

☒ Read-Only

☒ Read/Write

UNIX	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Kerberos 5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Kerberos 5i	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Kerberos 5p	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
NTLM	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Allow Superuser Access		
Superuser access is set to all		

OK

Cancel

**Modify Export Rule**

Client Specification:   
Enter comma-separated values for multiple client specifications

Rule Index:

Access Protocols:

☐ CIFS  
☒ NFS ☒ NFSv3 ☒ NFSv4  
☐ Flexcache

Access Details:

	<input checked="" type="checkbox"/> Read-Only	<input checked="" type="checkbox"/> Read/Write
UNIX	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Kerberos 5	<input type="checkbox"/>	<input type="checkbox"/>
Kerberos 5i	<input type="checkbox"/>	<input type="checkbox"/>
Kerberos 5p	<input type="checkbox"/>	<input type="checkbox"/>
NTLM	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/> Allow Superuser Access Superuser access is set to all		

OK Cancel

## Referencias

- <https://www.ierrea.com/single-post/2017/07/02/NetApp-FAS-1-Creaci%C3%B3n-de-Agregados-y-configuraci%C3%B3n-de-Networking-para-presentar-LUNs-a-trav%C3%A9s-de-SVN-SAN-por-iSCSI-a-un-servidor-Windows>
- <https://www.ierrea.com/single-post/2017/07/02/NetApp-FAS-2-Creaci%C3%B3n-de-SVM-Vol%C3%BAmenes-y-LUN-y-presentaci%C3%B3n-de-la-misma-a-trav%C3%A9s-de-iSCSI-a-un-servidor-Windows>

From:  
<http://wiki.intrusos.info/> - LCWIKI

Permanent link:  
<http://wiki.intrusos.info/doku.php?id=almacenamiento:netapp:ontap9&rev=1540550696>

Last update: **2023/01/18 14:11**

